


Enclose product overview

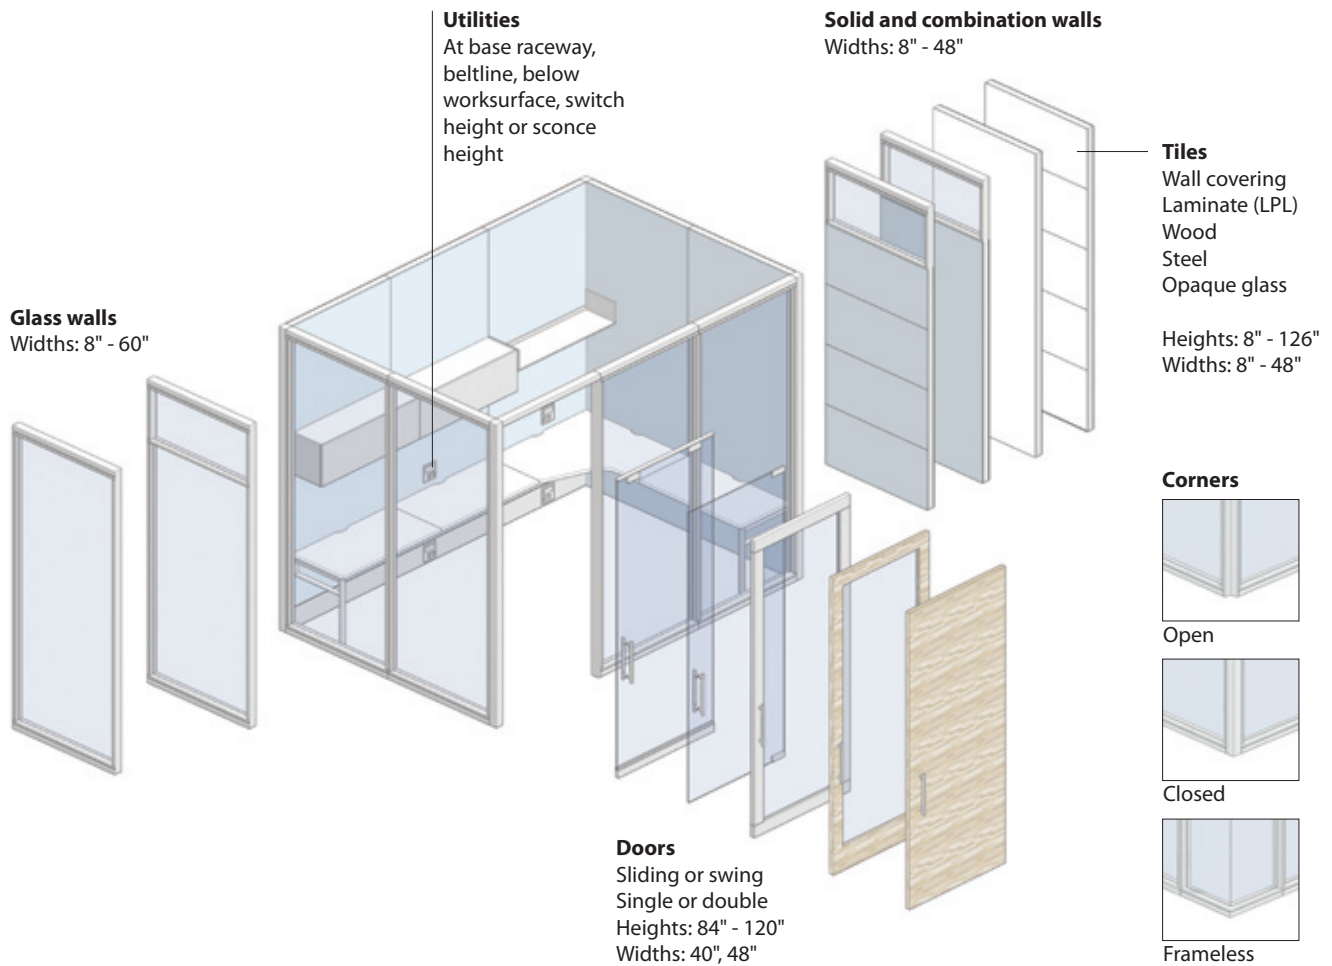

Wall panel construction

Wall thickness:	4"
Wall height:	User defined up to 10'-6" (12' upon testing and approval is possible)
Standard widths:	Standards as shown above or user defined
Solid panels:	Aluminum framing and surface materials; insulated with acoustic bat
Glass panels:	Aluminum or wood framing
Glass thickness:	3/16" (5mm) - 3/8" (10mm)
Wall Connector:	Wall panels are joined with an ABS vertical alignment connector

Doors

Door specifications and hardware:

- Swing doors:
 - Bar pulls
 - Passage sets
 - Locking sets
 - Mortise locks
 - Customers own hardware can be accommodated to match site requirements
- Sliding doors:
 - Bar pulls
 - Mortise locks (the only single action egress lock available for sliding doors)
 - Customers own hardware can be accommodated to match site requirements

Door materials:

- Wood or aluminum glazed
- Wood solid
- Glass slab

All doors available in single or double

Surface materials

Veneer

- Seven natural species
- Five reconstituted double-cut veneers

Powdercoat

- Three metallics, smooth paint
- Four standard smooth or textured paint
- Custom match available

Laminate

- Four standard colors
- Custom materials available


Wall covering

- Hundreds of standards available

Glass

- Clear, patterned, diffused
- Tempered
- Laminated
- Back painted glass
- Art glass
- Custom color matching available

Customers own materials are acceptable in many finishes

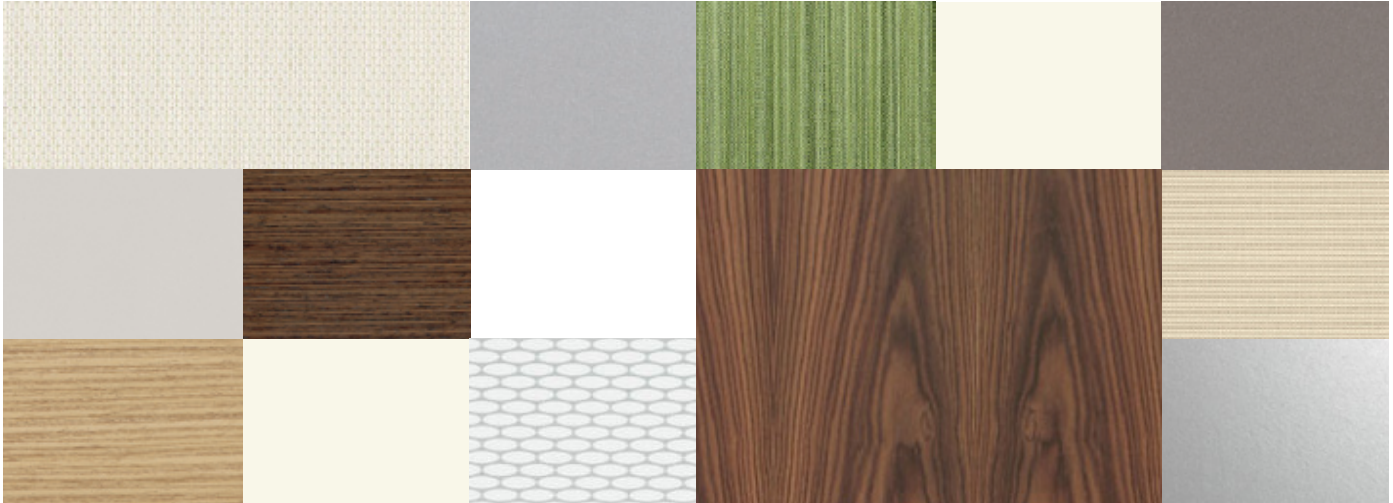

Features

Enclose walls feature a direct integration with Compose furniture components

- Worksurfaces
- Tackboards
- White boards
- Tool rails
- Overheads
- Shelves

Competitor's products can also hang on our moveable walls

Enclose offers a lateral stabilizer for regions that require bracing due to seismic conditions

Acoustics: STC scaleable from 40 to 48 based on substrate and finish material

Enclose walls offer a range of glass thicknesses from 3/16" (5mm) to 3/8" (10mm)

Note that certain glass types, such as laminated glass, will provide enhanced speech privacy when incorporated into Enclose.

Leveling adjustment: 3" total

- Doors and frames have the same leveling range as wall panels

Floor attachment: Haworth

- Non-marring carpet gripper for soft floor covering.
- Non-marring, hard-surface gripper pad for hard floors

All building interfaces (ceiling, hard wall, columns and window mullions) are trimmed with a light and sound seal

Enclose is PVC free and features formaldehyde-free insulation

Compose components work with Enclose

Worksurface examples



Rectangular

Depths: 18", 24", 30"
Widths: 24", 27", 30", 33", 36", 39", 42", 45", 48", 51", 54", 57", 60", 63", 66", 69", 72", 75", 78", 80", 81", 84", 87", 90", 93", 96", 99", 102", 105", 108", 111", 114", 117", 120"



Wedge

Depths: 18"/24", 24"/30"
Widths: 24", 30", 36", 40", 42", 48", 54", 60"



Bent

Depths: 24"
Widths: 36", 40", 42", 48", 60"



Transition

Depths: 18"/24", 24"/30"
Widths: 24", 30", 36", 42", 48", 54", 60"



Angled Corner

Depths: 18", 24"
Widths: 42", 48"



Merger

Depths: 18", 24", 30"
Widths: 36", 40", 42", 48"



90° Notched Corner

Depths: 18", 24"
Widths: 36", 40", 42", 48"



120° Corner Wrap Around

Depths: 18", 24", 30"
Widths: 36", 42", 48", 54", 60"

Worksurface supports



Support Panel

Height: 27"
Depths: 12", 18", 24", 30"



P Leg, Double Leg, Single Leg

Heights: 27"
Depths: 18", 24", 30"



Adjustable Disc Base

Height: 27" - 31"
Diameter: 21"

Tables



Octagon

36" x 72"
42" x 84"
48" x 96"



Round

30", 36", 42", 48"

As well as integrating with Compose™ Open Plan System and Patterns™ Architectural System, Enclose has been designed to work with these Haworth products: X Series® and V Series® storage and casegoods, Compose components, Power Base™ Pre-Terminated Zone, and TecCrete® Access Flooring.

Overhead storage



Standard Mount

Depth: 14"
Height: 16"
Widths: Please refer to price list



Open Shelf

Depth: 14"
Height: 8"
Widths: 24", 30", 36", 40", 42", 48", 54", 60", 66", 72"

Electrical

Haworth offers 4 levels of electrical readiness:

- 1 Site installed: no wiring or devices installed in factory – conduit, boxes, devices by others
- 2 Rough in: conduit and boxes factory installed – wiring and devices by others
- 3 Pre-wired: conduit, wiring, devices and face plates factory installed
- 4 Modular electrical: multi-circuit, quick-connect Powerbase system (in base raceway or removable faces only) – data and communication devices by others

Vertical and horizontal electrical distribution is available

Enclose walls can be powered either with a whip or hard wire connection; from the floor, the ceiling or adjacent walls.

Please contact your local Haworth dealership for more information on Enclose moveable walls. Visit haworth.com to find the dealer nearest you.

For more information call 800.344.2600 or 616.393.3000.

Haworth is a registered trademark of Haworth, Inc.

Printed in USA ©Haworth, Inc. 2006 09.06

This brochure is printed on Mohawk 50/10 paper made with 15% recycled fiber, processed chlorine free.

haworth.com | haworth-europe.com | haworth-asia.com

HAWORTH®
change by design